



[Homepage](#) > [Products](#) > [RFID Antennas](#) > [865-870 MHz Reader Antennas](#) > **Circular Antennas**

CIRCULAR ANTENNAS

MT-262042/CLH

865-870MHZ & 902-928MHZ 8.0 DBIC LHCP SLIM READER ANTENNA



ELECTRICAL

REGULATORY COMPLIANCE	RoHS, CE 0682
FREQUENCY RANGE	865-870 & 902-928 MHz
GAIN	7.5 ± 1.0 dBic
VSWR	1.5 :1 (typ) , 2 : 1(max)
POLARIZATION	LHCP
3dB ELEVATION BEAMWIDTH	70° (typ)
3dB AZIMUTH BEAMWIDTH	20° (typ)
F/B RATIO	20 dB (typ)
POWER	6W (max)
INPUT IMPEDANCE	50 (ohm)
AXIAL RATIO	2 dB (typ) , 4 dB (max)
LIGHTNING PROTECTION	DC Grounded

MECHANICAL

DIMENSIONS	700 x 250mm x12mm (TBD)
CONNECTOR	SMA Female
WEIGHT	2 Kg (max)
RADOME MATERIAL	Plastic
MTBF	80000 hours
BASE PLATE MATERIAL	Metallic


[ADD TO COMPARE PAGE](#) [TO COMPARE PAGE](#)

ENVARIOMENTAL



TEST	STANDARD	DURATION	TEMPERTURE	NOTES
LOW TEMPERATURE	IEC 68-2-1	72 h	-20°C	
HIGH TEMPERATURE	IEC 68-2-2	72 h	+55°C	
TEMP. CYCLING	IEC 68-2-14	1 h	-20°C +55°C	3 Cycles

HUMIDITY	ETSI EN300-2-4 T4.1E	144 h	95%
WATER TIGHTNESS	IEC 529		IP54
DUST RESISTANCE			IP54
FLAMMABILITY	UL 94		Class V2
QUASI RANDOM VIBRATION			2 0g rms for 4 hours
VIBRATION	IEC 60721-3-4	30 min/axis	Random 4M3
MECHANICAL SHOCK	IEC 60721-3-4		4M3

**AZIMUTH RADIATION PATTERN MIDBAND
FREQ. 0.915 GHZ**

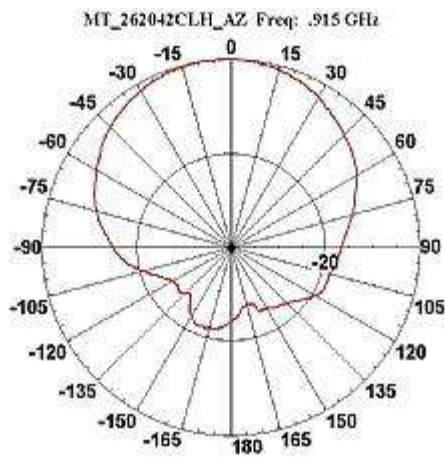

**ELEVATION RADIATION PATTERN MIDBAND
FREQ. 0.915 GHZ**

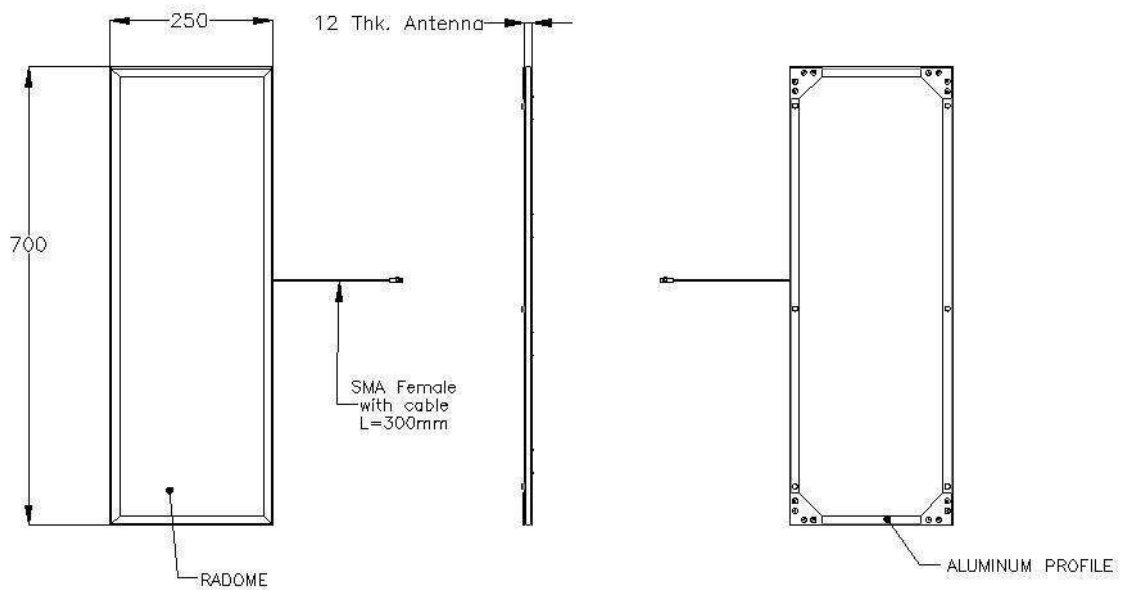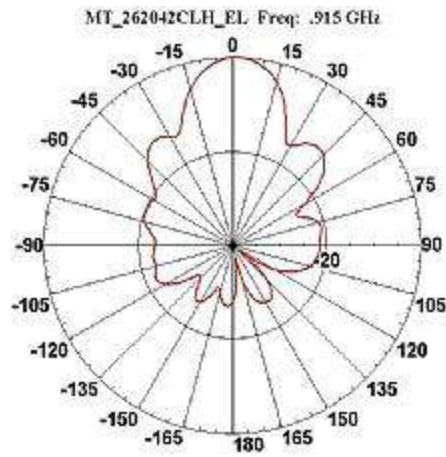

WAIVER!

While the information contained in this document has been carefully compiled to the best of our present knowledge, it is not intended as presentation or warranty of any kind on our part regarding the fitness of the products concerned for any particular use or purpose and neither shall any statement contained herein be construed as a recommendation to infringe any industrial property rights or as a license to use any such rights. The fitness of each product for any particular purpose must be checked beforehand with our specialists.